

Thermostat Control Griddle

Model : TATG-24

FEATURES & BENEFITS

- Stainless steel front, sides and 4" front top ledge
- 4" backsplash with tapered side splashes
- One thermostat control for each burner
- One 22,000 BTU/hr U shaped aluminized burner for every 12" of griddle width
- Ergonomically designed heat resistant PPS (Poly Phenylene Sulfide) On-Off knob
- 1" polished steel griddle plate
- Adjustable standing pilot for each burner
- High efficiency griddle will provide faster cooking and recovery but use less gas
- 3/4" rear gas connection and gas pressure regulator
- 2" stainless steel legs included

SANITATION
NSF/ANSI 4

Model	Control	#of Burners	Total BTUs	Plate Depth	Crated Weight (lbs.)	W x D x H [†] (inches)
TATG-24	Thermostat	2	44,000	22	218	24 x 30 1/2 x 12 1/2

Thermostat Control Griddle

Model : TATG-24

DATA	
Gas Type	NAT/LP Convertible
Gas Connection	3/4"
Regulator	3/4"
Gas Pressure	NAT : 5W.C" / LP : 10W.C"
BTU	44,000
SHIPPING DATA	
Class	85
Length (in.)	24 (610mm)
Depth (in.)*	30 1/2 (775mm)
Height (in.)†	12 1/2 (317mm)
Net / Gross Weight (lbs.)	183 / 218

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.


* Depth does not include 3/4" for rear gas connection.

† Height does not include 2" for leg height.


■ WARRANTY : 1 Year Labor and Parts Warranty

PLAN VIEW


(unit : inch)



TOP VIEW



FRONT VIEW

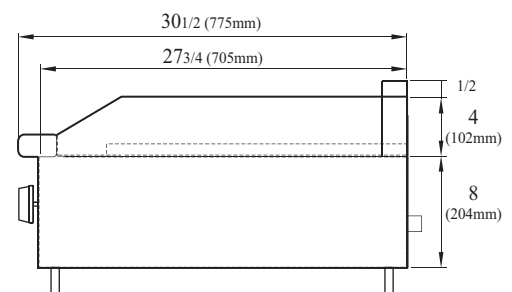

SIDE VIEW

Ver.20251105



■ Parts and Warranty: 800-500-3519