

4184 E. Conant st., Long Beach, CA 90808 Tel. 800-500-3519 Fax. 310-900-1066

www.gkradiance.com

Project :	
Model #:	
Item #:	Qty:
Available W/H:	
Approval :	

Convection Ovens

Model: RBCO-N1





*Each oven has individual electrical connection

___ FEATURES & BENEFITS =__

■ Prestigious exterior design

An exterior design that fits well in open-type kitchen elevating the ambience of the bakery.

■ Hot air and steam

Motor and propeller generate even flow of air inside the oven to enable even colorization of product.

- Door switch cutoff for fan thermal heat reflecting double glass doors
- Precise temperature control
 Sensitive to room temperature and actual temperature of oven.
- Stacking option Additional (1) oven stacking available.
- Menu saving function

■ Reverse circulation heating function

■ 60 minute timer

Flashing timer that signals heating time has started and is running.

- Stainless steel interior and exterior
- Fully insulated, completely sealed
- 4 speed bi-directional fan (optional)
 - 13.2" fan is standard
 - 100%, 80%, 60%, 40% of maximum speed when including option.





Model	Capacity	Tray Size (inches)	Length (inches)	Depth (inches)	Height (inches)	Net Weight (lbs.)
RBCO-N1	5 trays	16 x 24	303/4	411/8	661/8	331


Convection Ovens

Model: RBCO-N1

MODEL	RBCO-N1		
Exterior Dimension (L x D x H) (in.)	303/4 x 411/8 x 661/8		
Interior Dimension (L x D x H) (in.)	161/8 x 261/8 x 191/4		
Capacity	5 trays + optional pan rack		
Oven Voltage	220V, 3PH, 8kW, 60Hz, 21A (single oven)		
Wire Gauge	AWG11		
Tray Size (in.)	16 x 24		
Steam	Available at 302°		
Preset menu	5		
Temperature Range	90°F – 536°F		
Water Feed Pipe	1/2" ball valve		
Net Weight (lbs.)	331		

Design and specifications subject to change without notice. Most updated spec sheets are available at www.gkradiance.com. Actual shipping weight may differ due to extra packing materials for product protection.

■ WARRANTY: 1 Year Parts and Labor Warranty

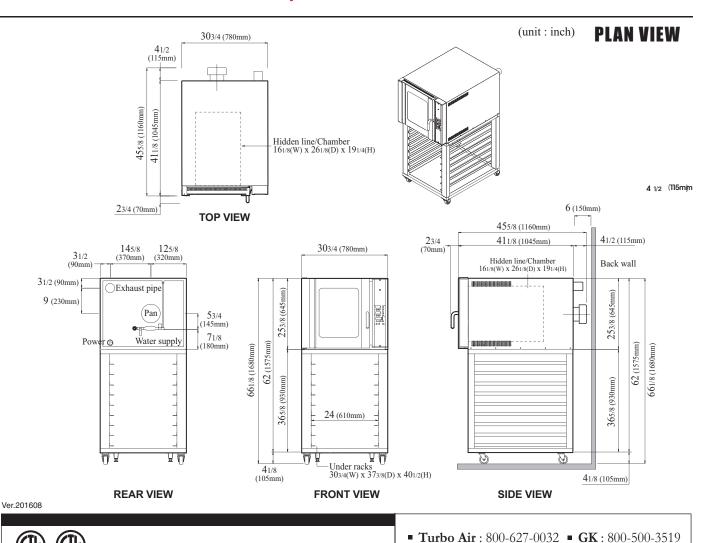











■ Warranty: 800-381-7770 ■ AC: 888-900-1002