

4184 E. Conant St. Long Beach, CA 90808 Tel. 888-900-1002 Fax. 310-900-1088 www.turboairinc.net

Project :	
Model #:	
Item #:	Qty:
Approval :	

Medium Profile Coil

Model: ADM380AE



🚅 FEATURES / BENEFITS 🖳

■ Feature

- More space in the electrical cavity
- Electrical board is now facing forward for easy installation and servicing.
- All wiring (solenoid and motor) is now located in the bottom of the unit for easy access.
- Charge nipple provided for suction pressure measurement.
- Aluminum case are now powder coated for corrosion protection.
- FAN GUIDE GRILL provided for air throw extension.
- Drain pan hinged on rear for easy acces and applied double drain pan for thermal efficiency.

■ Front Access with More Space

- Design features easy front access to both electrical and refrigeration components.
- More space in the electrical cavity makes the unit easier to service and install.
- Front facing electrical control board.

Wiring

- Solenoid harness is standard
- Motor and solenoid harnesses are attached to sheet metal panels and are now located at the bottom of the unit for easy access.
- Holes in the bottom of the sheet metal panels for easier wire routing.
- Easy plug connectors for motor harness.

Heaters & Coil

- Coil heater slots have been enlarged for easier installation and replacement.
- Fixed defrost termination and adjustable defrost cycle on electric defrost.





Medium Profile Coil

Model: ADM380AE

ADR Air Defrost Models 60Hz. With EC Motors.

	Capacity BTUH	Fan Data		EC Motor Data 115V 1Ph 60Hz		
ADR	10°F TD				Total	
Model	25°F SST	CFM	No.	HP	Amps	Watts
ADM380AE	38006	7395	3	1/3	13.20	750


	Connections (Inches)				
ADR Model	Coil Inlet	Suction	External Equalizer	Drain	Approx. Net Wt. Lbs
ADM380AE	7/8 OD	1-3/8 OD	1/4 OD	3/4 MPT	179

Design and specifications subject to change without notice

■ WARRANTY: 1 Year Compressor Warranty (4 Year extended warranty available)

1 Year Fan Motor and Parts Warranty



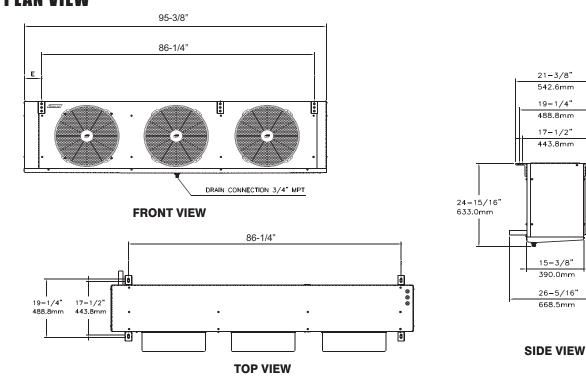



■ **Toll Free**: 888-900-1002

21-3/8" 542.6mm 19-1/4" 488.8mm 17-1/2" 443.8mm

15-3/8" 390.0mm 26-5/16"

668.5mm





