



4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

Glass Door Heated Cabinet

Reach-In **PRO Series**

≡ FEATURES & BENEFITS ≡

Model : PRO-15H-G

- Keeps food products safe by maintaining constant temperatures
- Alarm beeps when doors are not sealed
- Early warning alarm program detects issues before malfunction occurs
- Digital display allows for easy monitoring
- Sensitive touch display

■ **Ducted fan air distribution system**
Maintains temperature within the food zone

■ **On/Off switch**
ON/OFF switch is located on control panel

■ **All stainless steel cabinet construction**
The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

■ **Sturdy, clean stainless steel shelving**
Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

■ **LED interior lighting**
Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

■ **High-density polyurethane insulation**
The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ **Full length glass doors with locks**

■ **Self-closing doors with stay open feature at 120 degrees**

■ **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**



A circular logo with a red border. The words "3 YEARS" are at the top, "WARRANTY" are at the bottom, and "SAMSUNG" is in the center.

ENERGY STAR®
Qualified

Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D [*] x H [†] (inches)
PRO-15H-G	1	14	3	950	8.5	265	17³/₄ x 34³/₈ x 78

Glass Door Heated Cabinet

Reach-In
PRO Series

Model : PRO-15H-G

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	(1) NEMA 5-15P
Full Load Amperes	8.5
Wattage (W)	950
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	1
# of Racks Accepted	-
Net Capacity (cu. ft.)	14
Ext. Length Overall (in.)	17 3/4 (451mm)
Ext. Depth Overall (in.) [*]	34 3/8 (872mm)
Ext. Height Overall (in.) [†]	78 (1982mm)
Int. Length Overall (in.)	13 3/4 (350mm)
Int. Depth Overall (in.)	25 3/8 (643mm)
Int. Height Overall (in.)	58 3/4 (1493mm)
# of Shelves	3
Shelf Size (L x D) (in.)	12 1/2 x 25 1/8
Net Weight (lbs.)	235
Gross Weight (lbs.)	265

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

^{*} Depth does not include 1-3/8" for door handles.

[†] Height does not include 5" for caster height.

■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES

- Door locks
- 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design


** Lead time applies. Please contact your sales representative for more details to order.

■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: H15R915080

PLAN VIEW

(unit : inch)

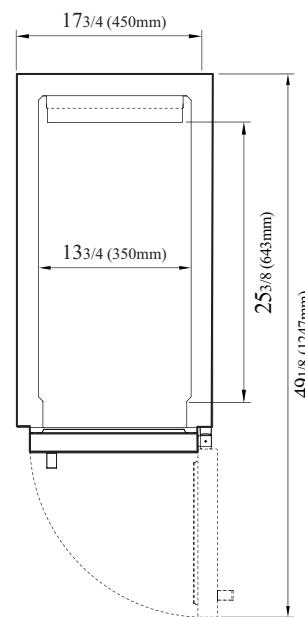

TOP VIEW

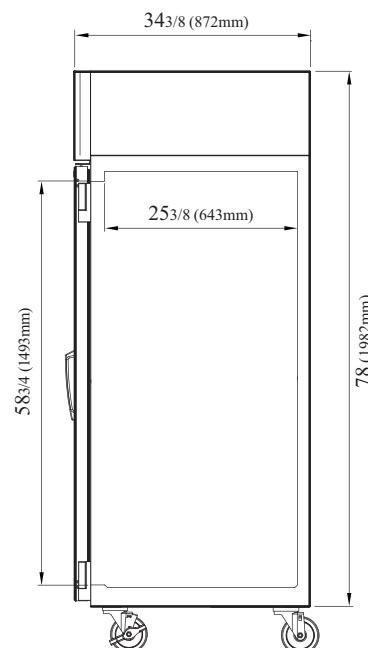

SIDE VIEW

Ver.20251231

- Turbo Air: 800-627-0032
- Bake Tech Innovation: 800-500-3519
- Warranty: 800-381-7770
- AC: 888-900-1002



ENERGY STAR®
Qualified

Turbo air

BAKE TECH
INNOVATION

Turbo air

texaking

Continued product development may necessitate specification changes without notice.