



more durable, efficient, beautiful

4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

Pass Thru Glass Door Heated Cabinet

Pass-Thru
PRO Series

FEATURES & BENEFITS

Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- Alarm beeps when doors are not sealed
- Early warning alarm program detects issues before malfunction occurs
- Digital display allows for easy monitoring
- Sensitive touch display

Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

LED interior lighting

Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Full length glass doors with locks

Self-closing doors with stay open feature at 120 degrees

Heated cabinet holds 140°F ~ 180°F for the best in food preservation

- PRO-26H-G-PT: Right hinged, 115V
- PRO-26H-G-PT-L: Left hinged, 115V
- PRO-26H2-G-PT: Right hinged, 208V
- PRO-26H2-G-PT-L: Left hinged, 208V

**Model : PRO-26H-G-PT(-L)
PRO-26H2-G-PT(-L)**



MADE IN
U. S. A.
ENERGY STAR®
Qualified
(Right hinged, 115V & 208V only)

Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D *x H † (inches)
PRO-26H-G-PT(-L)	2	28	3	1550	13.5 7.5	344	28 ^{3/4} x 36 ^{1/4} x 78
PRO-26H2-G-PT(-L)							

Pass Thru Glass Door Heated Cabinet

Pass-Thru
PRO Series

Model : PRO-26H-G-PT(-L) PRO-26H2-G-PT(-L)

ELECTRICAL DATA	PRO-26H-G-PT(-L)	PRO-26H2-G-PT(-L)
Voltage	115V/60Hz/1Ph	208~230V/115V/60Hz/1Ph
Plug Type	(i) NEMA 5-15P	(i) NEMA L14-20P
Full Load Amperes	13.5	7.5
Wattage (W)	1550	1550
Cord Length (ft.)	8	8
DIMENSIONAL DATA		
# of Doors	2	2
# of Racks Accepted	1	1
Net Capacity (cu. ft.)	28	28
Ext. Length Overall (in.)	28 ³ / ₄ (730mm)	28 ³ / ₄ (730mm)
Ext. Depth Overall (in.) [*]	36 ¹ / ₄ (920mm)	36 ¹ / ₄ (920mm)
Ext. Height Overall (in.) [†]	78 (1982mm)	78 (1982mm)
Int. Length Overall (in.)	22 (559mm)	22 (559mm)
Int. Depth Overall (in.)	27 ⁵ / ₈ (702mm)	27 ⁵ / ₈ (702mm)
Int. Height Overall (in.)	58 ³ / ₄ (1493mm)	58 ³ / ₄ (1493mm)
# of Shelves	3	3
Shelf Size (L x D) (in.)	23 ¹ / ₂ x 26 ³ / ₈	23 ¹ / ₂ x 26 ³ / ₈
Net Weight (lbs.)	299	299
Gross Weight (lbs.)	344	344

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/2" for door handles.

† Height does not include 5" for caster height.

■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES


- **Door locks**
- **4" dia. swivel casters with locks on the front set**
- **Easy replaceable one piece magnetic door gaskets**
- **Solid and sturdy grille design**

■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: H26R901680
- Tray slides kits: TS1-N1(#1), TS1-N4(#4), TS1-UN(Universal), TS1-N1 HALF, TS1-N4 HALF, TS1-UN HALF

PLAN VIEW

(unit : inch)

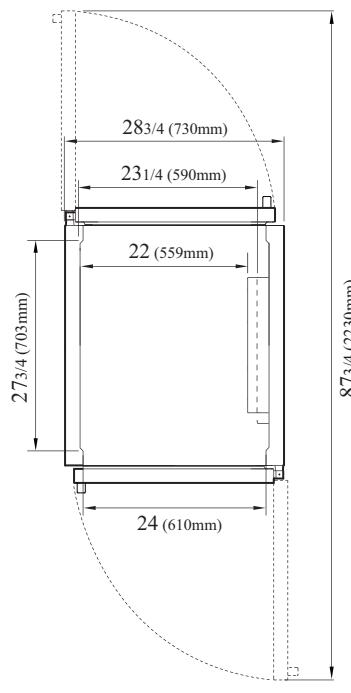

TOP VIEW

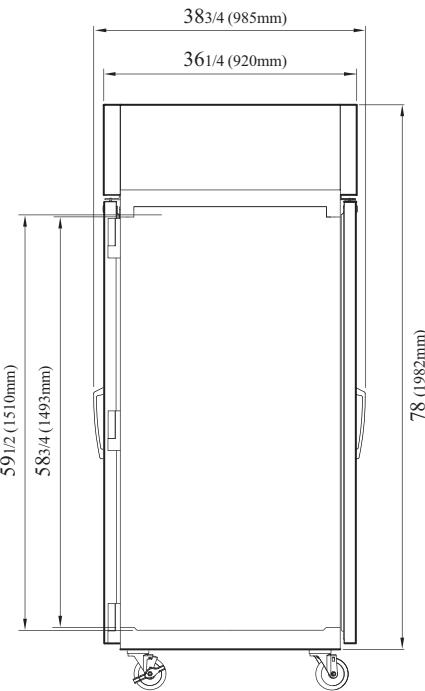

SIDE VIEW

Ver.20241111

- **Turbo Air:** 800-627-0032
- **Bake Tech Innovation:** 800-500-3519
- **Warranty:** 800-381-7770
- **AC:** 888-900-1002



MADE IN
U. S. A.
ENERGY STAR®
Qualified
(Right hinged, 115V & 208V only)

Turbo air BAKE TECH INNOVATION

Turbo air Texaking

Continued product development may necessitate specification changes without notice.