

Roll-In Solid Door Heated Cabinet

Roll-In
PRO Series

Model : PRO-26H-RI(-L) PRO-26H2-RI(-L)

ELECTRICAL DATA	PRO-26H-RI(-L)	PRO-26H2-RI(-L)
Voltage	115V/60Hz/1Ph	208~230V/115V/60Hz/1Ph
Plug Type	NEMA 5-15P	NEMA L14-20P
Full Load Amperes	13.5	7.5
Wattage (W)	1550	1550
Cord Length (ft.)	8	8
DIMENSIONAL DATA		
# of Doors	1	1
# of Rack Accepted (Size (L x D x H) (in.))	1 (27 x 29 x 66)	1 (27 x 29 x 66)
Net Capacity (cu. ft.)	35.51	35.51
Ext. Length Overall (in.)	34 (865mm)	34 (865mm)
Ext. Depth Overall (in.)	37 3/4 (960mm)	37 3/4 (960mm)
Ext. Height Overall (in.) [*]	84 1/4 (2140mm)	84 1/4 (2140mm)
Int. Length Overall (in.)	27 3/8 (694mm)	27 3/8 (694mm)
Int. Depth Overall (in.)	31 (788mm)	31 (788mm)
Int. Height Overall (in.)	66 7/8 (1699mm)	66 7/8 (1699mm)
Net Weight (lbs.)	391	391
Gross Weight (lbs.)	436	436

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles. Depth does not include 3-1/2" for ramp.


■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES


- Door locks
- Solid and sturdy grille design
- Heavy duty stainless steel ramp

PLAN VIEW

(unit : inch)

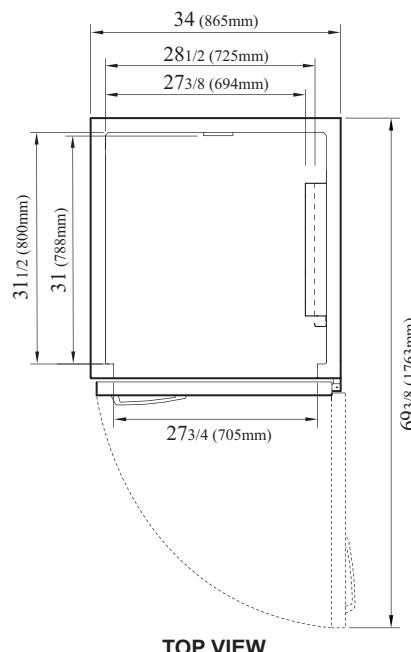

TOP VIEW

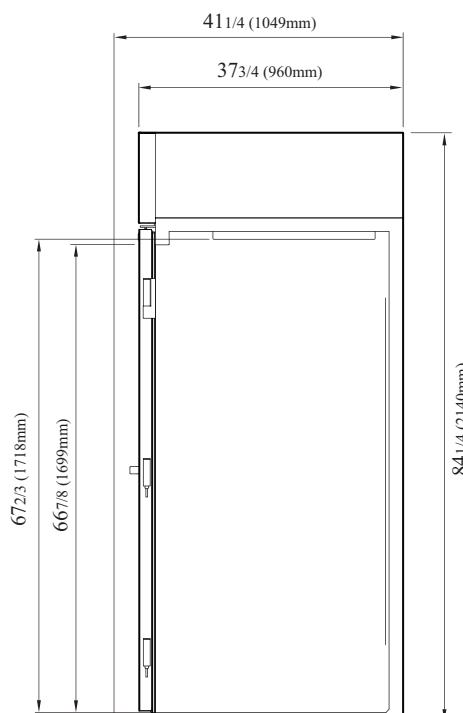

SIDE VIEW

Ver.20251231

- Turbo Air: 800-627-0032
- Bake Tech Innovation: 800-500-3519
- Warranty: 800-381-7770
- AC: 888-900-1002



ENERGY STAR® Qualified

Turbo air

BAKE TECH INNOVATION

Turbo air Texaking

Continued product development may necessitate specification changes without notice.