



more durable, efficient, beautiful

4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

Pass Thru Half Solid Door Heated Cabinet

Pass-Thru
PRO Series

FEATURES & BENEFITS

Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- Alarm beeps when doors are not sealed
- Early warning alarm program detects issues before malfunction occurs
- Digital display allows for easy monitoring
- Sensitive touch display

Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

LED interior lighting

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

Half length stainless steel solid doors with locks

Self-closing doors with stay open feature at 120 degrees

Heated cabinet holds 140°F ~ 180°F for the best in food preservation

- PRO-50-4H-PT: Standard hinged
- PRO-50-4H-PT-AL: All Left hinged
- PRO-50-4H-PT-AR: All Right hinged



MADE IN
U. S. A.



ENERGY STAR®
Qualified
(Standard hinged only)

Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D' x H † (inches)
PRO-50-4H-PT(-AL)(-AR)	8	48.7	6	3000	15	510	51 ^{3/4} x 36 ^{1/4} x 78

Pass Thru Half Solid Door Heated Cabinet

Pass-Thru
PRO Series

Model : PRO-50-4H-PT(-AL)(-AR)

ELECTRICAL DATA	
Voltage	208~230V/115V/60Hz/1Ph
Plug Type	NEMA L14-20P
Full Load Amperes	15
Wattage (W)	3000
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	8
# of Racks Accepted	2
Net Capacity (cu. ft.)	48.7
Ext. Length Overall (in.)	51 3/4 (1314mm)
Ext. Depth Overall (in.)*	36 1/4 (920mm)
Ext. Height Overall (in.)†	78 (1982mm)
Int. Length Overall (in.)	42 1/4 (1073mm)
Int. Depth Overall (in.)	27 3/4 (703mm)
Int. Height Overall (in.)	58 3/4 (1493mm)
# of Shelves	6
Shelf Size (L x D) (in.)	22 3/4 x 26 3/8
Net Weight (lbs.)	452
Gross Weight (lbs.)	510

Design and specifications subject to change without notice.


Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/4" for door handles.


† Height does not include 5" for caster height.

PLAN VIEW

(unit : inch)

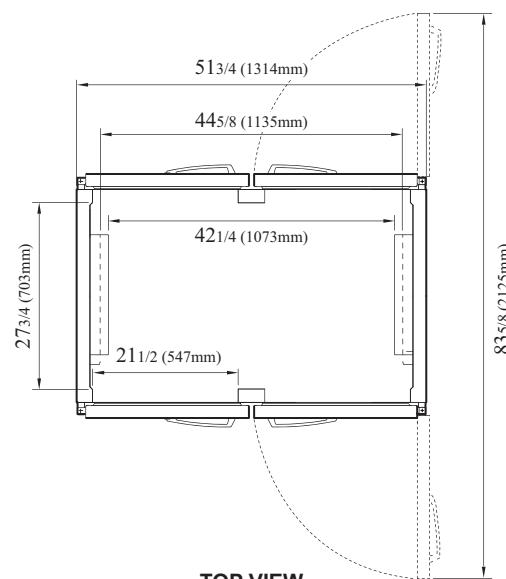

TOP VIEW

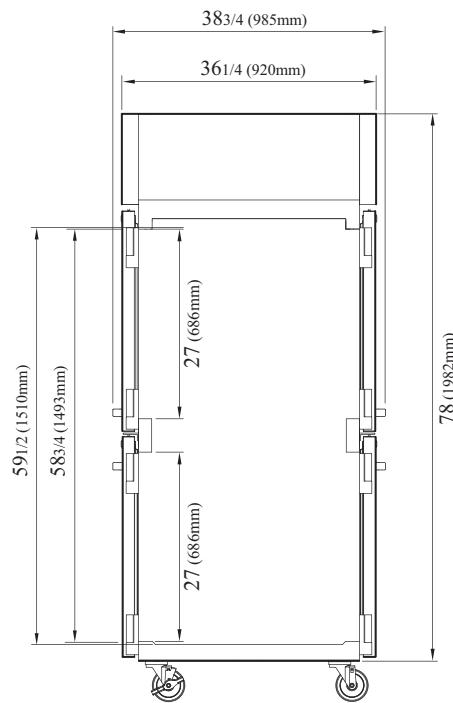

SIDE VIEW

Ver.20251231

- Turbo Air: 800-627-0032
- Bake Tech Innovation: 800-500-3519
- Warranty: 800-381-7770
- AC: 888-900-1002



MADE IN
U. S. A.
ENERGY STAR®
Qualified
(Standard hinged only)

REFRIGERATOR MANUFACTURER

Turbo air

BAKE TECH
INNOVATION

REFRIGERATION SYSTEM

Turbo air Texaking

Continued product development may necessitate specification changes without notice.