

| | | | |
|--|--|-------------------|--------|
|  REFRIGERATOR MANUFACTURER Turbo air more durable, efficient, beautiful | 4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com | Project: | |
| | | Model #: | |
| | | Item #: | |
| | | Available W/H: | Qty: |
| | | Approval: | |
| | | AIA #: | SIS #: |
| | | CSI Section 11400 | |

Pass Thru Solid Door Heated Cabinet

*Pass-Thru
PRO Series*

Model : PRO-50H-PT

≡ FEATURES & BENEFITS ≡

- **Digital temperature control & monitor system**

 - Keeps food products safe by maintaining constant temperatures
 - Alarm beeps when doors are not sealed
 - Early warning alarm program detects issues before malfunction occurs
 - Digital display allows for easy monitoring
 - Sensitive touch display

- **Ducted fan air distribution system**

Maintains temperature within the food zone

- **On/Off switch**

ON/OFF switch is located on control panel

- **All stainless steel cabinet construction**

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

- **Sturdy, clean stainless steel shelving**

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

- **LED interior lighting**

- **High-density polyurethane insulation**

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- **Full length stainless steel solid doors with locks**

- **Self-closing doors with stay open feature at 120 degrees**

- **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**

- **Lifetime guaranteed heavy duty hinges and handles**



| Model | Swing Door | CU./FT. | #of Shelves | Wattage (W) | AMPS | Crated Weight (lbs.) | L x D x H [†] (inches) |
|------------|------------|---------|-------------|-------------|------|----------------------|--|
| PRO-50H-PT | 4 | 48.7 | 6 | 3000 | 15 | 510 | 51 ³ / ₄ x 36 ¹ / ₄ x 78 |

Pass Thru Solid Door Heated Cabinet

Pass-Thru
PRO Series

Model : PRO-50H-PT

| ELECTRICAL DATA | |
|----------------------------|--|
| Voltage | 208/115/60/1 |
| Plug Type |  NEMA L14-20P |
| Full Load Amperes | 15 |
| Wattage (W) | 3000 |
| Cord Length (ft.) | 8 |
| DIMENSIONAL DATA | |
| # of Doors | 4 |
| # of Racks Accepted | 2 |
| Net Capacity (cu. ft.) | 48.7 |
| Ext. Length Overall (in.) | 51 3/4 (1314mm) |
| Ext. Depth Overall (in.)* | 36 1/4 (920mm) |
| Ext. Height Overall (in.)† | 78 (1982mm) |
| Int. Length Overall (in.) | 42 1/4 (1073mm) |
| Int. Depth Overall (in.) | 27 5/8 (702mm) |
| Int. Height Overall (in.) | 58 3/4 (1493mm) |
| # of Shelves | 6 |
| Shelf Size (L x D) (in.) | 22 3/4 x 26 3/8 |
| Net Weight (lbs.) | 452 |
| Gross Weight (lbs.) | 510 |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/2" for door handles.

† Height does not include 5" for caster height.

■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES


- Door locks
- 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design

■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI:
M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700
- Half door bun tray rack: TSP-2224
(each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250
(each holds up to fifteen 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N1LR HALF, TS23-N4LR(#4),
TS23-N4LR HALF, TS23-UNLR-H(Universal), TS23-UNLR-H HALF
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470

PLAN VIEW

(unit : inch)

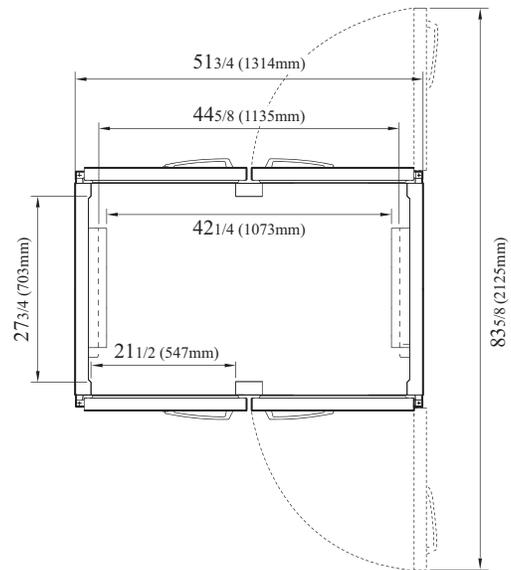

TOP VIEW

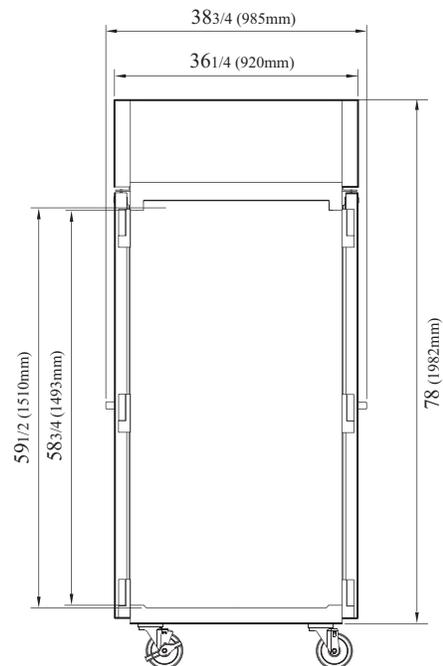

SIDE VIEW

Ver.20230126



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

GERMAN
KNIFE

RADIANCE

REFRIGERATION SYSTEM
Turbo air **TEXAKING**

Continued product development may necessitate specification changes without notice.