

4184 E. Conant St.					
Long Beach, CA 90808					
Tel. 310-900-1000					
Fax. 310-900-1077					
www.turboairinc.com					

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA #:	SIS #:	
CSI Section 11400		

Model: TUR-72SD-D6-FB-N

Undercounter Refrigerator - Drawers / Front Breathing Airflow

Undercounters Super Deluxe Series

Patented Self-Cleaning Condenser





____ FEATURES & BENEFITS ____

Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system Keeps food products safe by maintaining constant temperatures.

External digital display allows for easy monitoring.

Front Breathing airflow

Front Breathing airflow is designed to draw in air and discharge from the front, allowing units to run at high efficiency in tight spaces and eliminates the need for surrounding clearances.

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3)

- High-density polyurethane insulation The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- Stainless steel cabinet construction

The Turbo Air Super Deluxe model boasts a stainless steel interior and exterior (galvanized steel back & bottom). It guarantees the utmost in cleanliness and long product life. The Super Deluxe adds a touch of style to the most refined setting.

- Each top drawer accommodates up to 6" deep, (2) two 1/3 size pans with (2) two 1/6 size pans or (6) six 1/6 size pans. And each bottom drawer accommodates up to 6" deep, (2) two 1/3 size pans or (4) four 1/6 size pans (drawer pans not included)
- Refrigerator holds 33°F ~ 38°F for the best in food preservation

TUR-72S	D-D6-FB-N	-	6	17.6	-	1/5	9.9	406	725/8 x 30 x 30
Ν	Iodel	Swing Doors	Drawers	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D x H [†] (inches)
						(U.S.A only)			

+ Height does not include 5-1/8" for caster height.

Undercounter Refrigerator - Drawers / Front Breathing Airflow

Model: TUR-72SD-D6-FB-N

ELECTRICAL DATA				
Voltage	115/60/1			
Plug Type	NEMA 5-15P			
Full Load Amperes	9.9			
Compressor HP	1/5			
Cord Length (ft.)	10			
Refrigerant	R-290			
DIMENSIONAL DATA				
Net Capacity (cu. ft.)	17.6			
Ext. Length Overall (in.)	725/8 (1846mm)			
Ext. Depth Overall (in.)	30 (762mm)			
Ext. Height Overall (in.) [†]	30 (761mm)			
# of Doors	-			
# of Drawers	6			
# of Shelves	-			
Net Weight (lbs.)	366			
Gross Weight (lbs.)	406			

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection. † Height does not include 5-1/8" for caster height.


5 Year Parts and Labor Warranty 7 Year Compressor Warranty **WARRANTY**:

STANDARD FEATURES

- Anti-corrosion coated evaporator
- Self-contained system
- 4" dia. swivel casters with locks on the front set

OPTIONAL ACCESSORIES

- 1" caster, 1/2" diameter & 13 TPI: S28R813660 (non-brake)
- 2.5" caster, 1/2" diameter & 13 TPI: 30265H0100 (non-brake), 30265H0200 (w/ brake)
- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, 1/2" 13 TPI x 1.54": LFM1213566
- 6" ABS plastic leg: 30221M0200
- 6" stainless steel leg: 30221M0600
- Single overshelf, stainless steel, 72-13/16" W: TSOS-6S

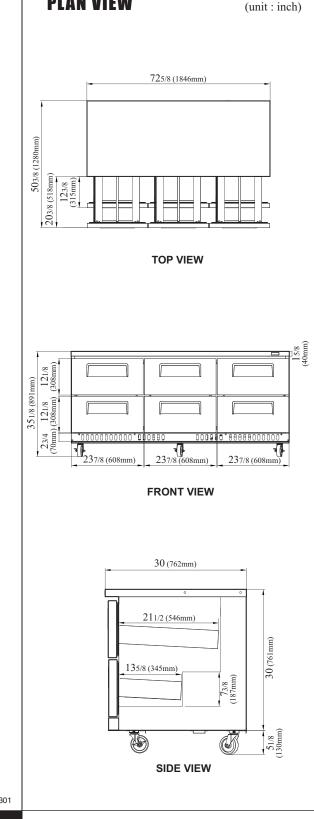

PLAN VIEW

Ver.20230301



Turbo air

(GEAMAN) KNIFE

- **Turbo Air** : 800-627-0032 **GK** : 800-500-3519
- **Warranty** : 800-381-7770 **AC** : 888-900-1002

Turbo air

Texaking

Continued product development may necessitate specification changes without notice.