

 <b>REFRIGERATOR MANUFACTURER</b> <b>Turbo air</b> more durable, efficient, beautiful	4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 <a href="http://www.turboairinc.com">www.turboairinc.com</a>		Project:
			Model #:
			Item #:
			Available W/H: Qty:
			Approval:
			AIA #: SIS #:
			CSI Section 11400

## Roll-In Solid Door Heated Cabinet

Roll-In  
PRO Series

**Model : PRO-89H-RI**

### FEATURES & BENEFITS

- **Digital temperature control & monitor system**
  - Keeps food products safe by maintaining constant temperatures
  - Alarm beeps when doors are not sealed
  - Early warning alarm program detects issues before malfunction occurs
  - Digital display allows for easy monitoring
  - Sensitive touch display
- **Ducted fan air distribution system**  
Maintains temperature within the food zone
- **On/Off switch**  
ON/OFF switch is located on control panel
- **All stainless steel cabinet construction**  
The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.
- **LED interior lighting**
- **High-density polyurethane insulation**  
The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- **Full length stainless steel solid doors with locks**
- **Self-closing doors with stay open feature at 120 degrees**
- **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**
- **Lifetime guaranteed heavy duty hinges and handles**




Model	Swing Doors	CU./FT.	#of Rack Accepted	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D* x H † (inches)
PRO-89H-RI	2	86.7	2	3000	15	722	66 7/8 x 37 3/4 x 89 3/4

# Roll-In Solid Door Heated Cabinet

Roll-In  
PRO Series

## Model : PRO-89H-RI

ELECTRICAL DATA	
Voltage	208~230V/115V/60Hz/1ph
Plug Type	 NEMA L14-20P
Full Load Amperes	15
Wattage (W)	3000
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	2
# of Rack Accepted (Size (L x D x H) (in.))	2 (27 x 29 x 66)
Net Capacity (cu. ft.)	86.7
Ext. Length Overall (in.)	66 7/8 (1700mm)
Ext. Depth Overall (in.)	37 3/4 (960mm)
Ext. Height Overall (in.)*	89 3/4 (2280mm)
Int. Length Overall (in.)	58 1/8 (1475mm)
Int. Depth Overall (in.)	33 3/8 (849mm)
Int. Height Overall (in.)	73 3/8 (1863mm)
Net Weight (lbs.)	661
Gross Weight (lbs.)	722

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 1-1/4" for door handles. Depth does not include 3-1/2" for ramps.


### ■ WARRANTY : 3 Year Parts and Labor Warranty

### ■ STANDARD FEATURES


- Door locks
- Solid and sturdy grille design
- Heavy duty stainless steel ramp

## PLAN VIEW

(unit : inch)

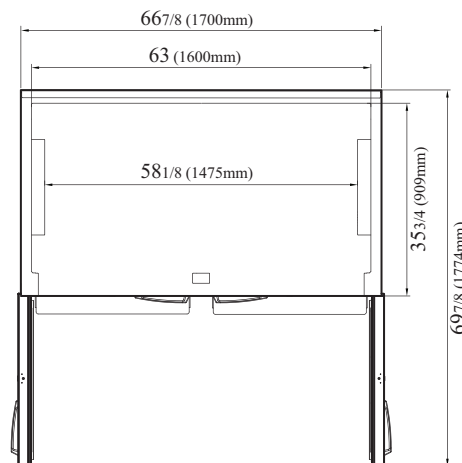

TOP VIEW

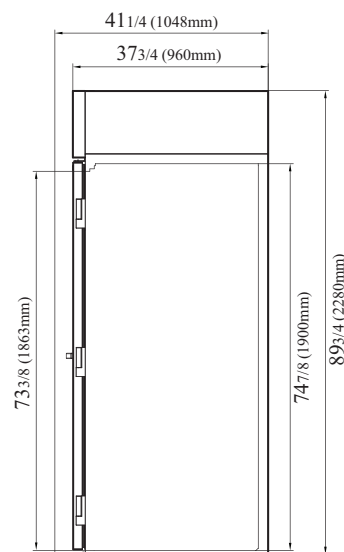

SIDE VIEW

Ver.20250603



- Turbo Air: 800-627-0032
- Radiance: 800-500-3519
- Warranty: 800-381-7770
- AC: 888-900-1002

Turbo air REFRIGERATOR MANUFACTURER

RADIANCE REFRIGERATION SYSTEM

Turbo air REFRIGERATION SYSTEM

Texaking

Continued product development may necessitate specification changes without notice.