

4184 E. Conant St. Long Beach, CA 90808 Tel. 888-900-1002 Fax. 310-900-1088 www.turboairinc.net

| Project : |      |
|-----------|------|
| Model #:  |      |
| Item #:   | Qty: |
| Approval: |      |

## **Condensing Unit**

Model: TH040LR404A2





### \_\_\_ FEATURES / BENEFITS =\_\_

- Blue anti-corrosion-fin increases the life span of the coil.
- Seamless inner groove copper tube increases the heat exchange rate by reducing the space between the fin and copper tube.
- Highest quality compressor in the world.



- Head pressure control stabilizes the freezing of liquid line, minimizes formation of flash gas to increase efficiency of the system, and prevents compressor damage by controlling high pressure.
- Experienced engineers have designed the system for maximum efficiency.
- Fan Blades : Specifically matched with motors and coil for maximum air movement and cooling.

- Control box is designed for easy installation.
- Low pressure control is adjustable.
- All the parts are compliant with industry standards and interchangeable with readily available parts.
- Wiring: Easily accessible. Compressor comes with a wiring harness that is manufactured with connections that will not come loose with vibration.
- Control box and service valves are located outside for easy service.
- Base : Heavy duty steel. Legs are 2-1/6" tall
- Cabinet: Prepainted with galvanized body. Protects against corrosion.
- All products carry UL, cUL, ISO 9001 approvals.









# **Condensing Unit**

## Model: TH040LR404A2

#### **PERFORMANCE CHART**

R404A

|               | 40°F(SST) | 30°F  | 25°F  | 20°F  | 0°F   | -10°F | -20°F | -25°F |
|---------------|-----------|-------|-------|-------|-------|-------|-------|-------|
| 90'F(AMBIENT) | -         | 43970 | 39510 | 35150 | 20560 | 14980 | 11830 | 8690  |
| 95'F          | -         | 41480 | 37270 | 33160 | 19400 | 14130 | 11160 | 8200  |
| 100'F         | -         | 38980 | 35030 | 31180 | 18240 | 13290 | 10500 | 7700  |
| 110'F         | -         | 36150 | 31240 | 27520 | 15210 | 11290 | 8920  | 6550  |

#### **SPECIFICATION**

|                            | TH040LR404A2                  |  |  |  |
|----------------------------|-------------------------------|--|--|--|
| Compressor                 | C\$27K6E-PFV                  |  |  |  |
| Line Size                  | 1/2" Liquid 1-1/8" Suction    |  |  |  |
| Refrigerant (Receiver 90%) | 18 lbs                        |  |  |  |
| Fan Data                   | 1Fan (3760CFM)                |  |  |  |
| Dimensions                 | 30.28(D) x 38.5(W) x 27.28(H) |  |  |  |
| Net Weight                 | 286 lbs                       |  |  |  |
| Power Supply               | 208-230/1ph/60hz              |  |  |  |
| Compressor Amp             | 23.9(RLA), 121(LRA)           |  |  |  |
| MCA/MOPD                   | 32.1/50                       |  |  |  |
| Sound dBA                  | 71                            |  |  |  |

Design and specifications subject to change without notice

■ WARRANTY: 1 Year Compressor Warranty (4 Year extended warranty available)


1 Year Fan Motor and Parts Warranty

(unit:inch)

#### **PLAN VIEW**

3, 4 and 5HP

- 30<sub>1/4</sub>" -21/5"

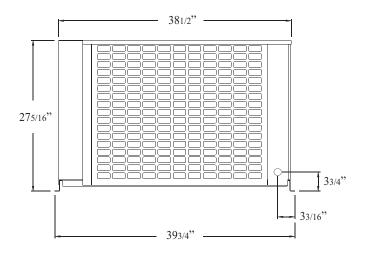

Ver. 20180606

Air Flow

 $\Rightarrow$ 







275/16"



■ **Toll Free**: 888-900-1002









