



4184 E. Conant St.
Long Beach, CA 90808
Tel. 888-900-1002
Fax. 310-900-1088
www.turboairinc.net

Project :

Model # :

Item # :

Qty :


Approval :

Extended Thin Profile Coil


Model : TTE064BE(OX, NX, OM, NM)



≡ FEATURES / BENEFITS ≡



Blue Anti-Corrosion
Hydrophobic Coated Fin.
Air Pass Guard for Better
Efficiency.



Inner Groove Copper Tube
for Maximum Coil Efficiency.
Mounted TXV, Solenoid,
Thermostat(Optional).

MODEL CAPACITY

- Air Defrost Coil: 5600(2 Fan) ~ 17500BTU(6 Fan)
- Electric Defrost Coil: 4900(2 Fan) ~ 13800BTU(6 Fan)

Extended Thin Profile Coil

Model : TTE064BE(OX, NX, OM, NM)

TTE ELECTRIC DEFROST MODEL 60HZ WITH EC MOTOR (DUAL SPEED)

Capacity (R-404A)				Capacity (R-448A / R-449A)				Fan Data		
10°F / 6°C TD - 20°F / - 29°C SST		12°F / 7°C TD - 22°F / - 30°C SST		10°F / 6°C TD - 20°F / - 29°C SST		12°F / 7°C TD - 22°F / - 30°C SST		CFM/m³H		No.
BTUH	Watts	BTUH	Watts	BTUH	Watts	BTUH	Watts			
6570	1924	8070	2363	6457	1891	7924	2321	1487	2527	2

EC Motor Data			Defrost Heaters		Connections (Inches)				Approx. Net Weight (Lbs. / Kg)	AWEF Value	
230V 1Ph 60Hz			Watts	Total Amps	COIL INLET	SUCTION	EQUALIZER	DRAIN		R-404A	R-448A / R-449A
HP	Total Amps	Watts		230/1/60							
1/25	0.90	50	1110	4.8	1/2 OD	5/8 ID	1/4 OD	3/4 MPT	45 / 20	4.00	4.00

No. of Fans	Dimensions (Inches / mm)			
	A	B	C	D
2	49.7 (1262)	40.8 (1037)	-	-

Design and specifications subject to change without notice

TTE064BEOX: R404A TXV "SBFSE-A-Z" (Inlet: 3/8", Outlet: 1/2") Pre-installed

TTE064BENX: R448A/R449A TXV "SBFDE-AA-Z" (Inlet: 3/8", Outlet: 1/2") Pre-installed


TTE064BEOM: R404A TXV "SBFSE-A-Z" (Inlet: 3/8", Outlet: 1/2") & LLSV "E3S130" (3/8") Pre-installed

TTE064BENM: R448A/R449A TXV "SBFDE-AA-Z" (Inlet: 3/8", Outlet: 1/2") & LLSV "E3S130" (3/8") Pre-installed


■ **WARRANTY : 1 Year Fan Motor and Parts Warranty**

PLAN VIEW

(unit : inch)

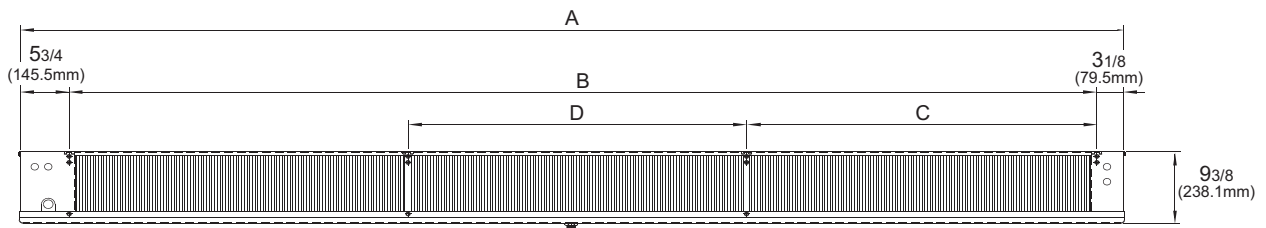

FRONT VIEW

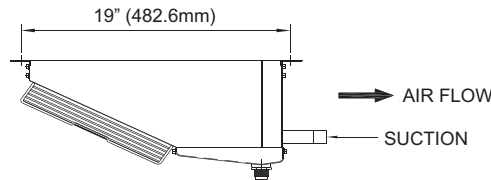

RIGHT SIDE VIEW



■ Toll Free: 888-900-1002



"Subject to change without notice" will allow Turbo Air to not be liable for small changes such as amperage, size or any other issue that someone would blame on us.