

Condensing Unit

Model : TS015XR404A2



FEATURES / BENEFITS

- Blue anti-corrosion-fin increases the life span of the coil.
- Seamless inner groove copper tube increases the heat exchange rate by reducing the space between the fin and copper tube.
- Highest quality compressor in the world.
- Control box is designed for easy installation.
- Low pressure control is adjustable.
- All the parts are compliant with industry standards and interchangeable with readily available parts.
- Wiring: Easily accessible. Compressor comes with a wiring harness that is manufactured with connections that will not come loose with vibration.
- Control box and service valves are located outside for easy service.
- Base: Heavy duty steel. Legs are 2-1/6" tall
- Cabinet: Prepainted with galvanized body. Protects against corrosion.
- All products carry UL, cUL, ISO 9001 approvals.
- Head pressure control stabilizes the freezing of liquid line, minimizes formation of flash gas to increase efficiency of the system, and prevents compressor damage by controlling high pressure.
- Experienced engineers have designed the system for maximum efficiency.
- Fan Blades: Specifically matched with motors and coil for maximum air movement and cooling.



Condensing Unit

Model : TS015XR404A2

PERFORMANCE CHART

R448/449A

	0°F	-10°F	-15°F	-20°F	-25°F	-30°F	-35°F	-40°F
90°F(AMBIENT)	9330	7492	6655	5936	5277	4640	4063	3540
95°F	8972	7172	6430	5746	5079	4472	3920	3416
100°F	8612	6902	6200	5513	4880	4303	3800	3290
110°F	7888	6470	5786	5159	4547	4045	3560	3104

R404A

	0°F	-10°F	-15°F	-20°F	-25°F	-30°F	-35°F	-40°F
90°F(AMBIENT)	9660	7864	7134	6370	5718	5114	4510	3964
95°F	9127	7452	6777	6060	5448	4838	4270	3794
100°F	8593	7039	6414	5747	5127	4608	4071	3590
110°F	-	-	5760	5183	4647	4148	3685	3296

SPECIFICATION


	TS015XR404A2
Compressor	ZF06KAE-PFV
Line Size	3/8" Liquid 5/8" Suction
Refrigerant (Receiver 90%)	8 lbs
Fan Data	1 Fan (1503CFM)
Dimensions	24.5(D) x 28.25(W) x 20.75(H)
Net Weight	178 lbs
Power Supply	208-230/1ph/60hz
Compressor Amp	13.6(RLA), 68(LRA)
MCA/MOPD	17.5/30
Sound dBA	68
AWEF Value (R-404A, R-448A / R-449A)	3.1, 3.1

Design and specifications subject to change without notice

- **WARRANTY :** 1 Year Compressor Warranty (4 Year extended warranty available)
1 Year Fan Motor and Parts Warranty

PLAN VIEW

(unit : inch)

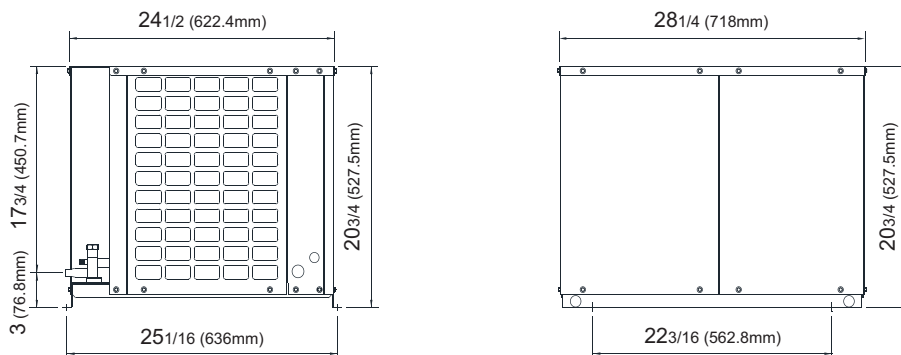

Ver.20201203



■ Toll Free : 888-900-1002

Turbo air REFRIGERATOR MANUFACTURER

GERMAN KNIFE

RADIANCE

Turbo air REFRIGERATION SYSTEM

texaking